

ACA-BL05SS-100

Accesorio cable sensor. Soporte doble en forma de "L", brazo de 50 mm. Fabricado en acero inoxidable. 100 ud.


L-Bracket

The ACA-BL series L-brackets is designed to support linear heat cable above the risk area e.g. the top run of a cable tray. A silicon protection sleeve is supplied with the unit to protect the sensor cable when fastened to the bracket.

Installation

The ACA-BL may be fitted to the cable tray and secured in place using a suitable bolt and nut at one end. The hole at the other end of the bracket allows for the securing of the sensor cable using a silicone sleeve and cable tie. The L-bracket allows support for the sensor cable at the selected distance away from the detection area.

Recommended spacing: 1m

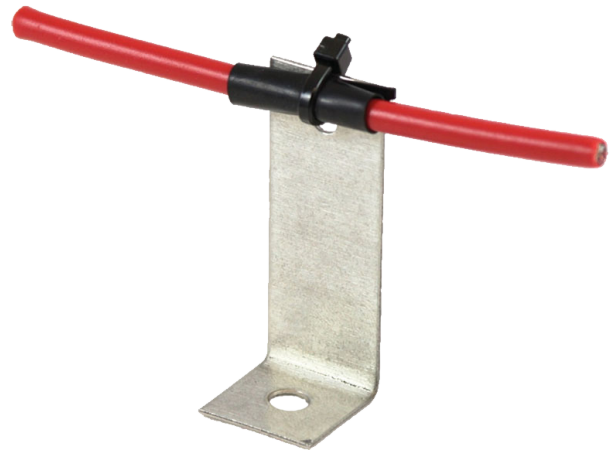

Details

- Easy installation of linear heat cable
- For use on cable trays
- Available in stainless steel
- Available in quantities of 100

ACA-BL05SS-100

Accesorio cable sensor. Soporte doble en forma de "L", brazo de 50 mm. Fabricado en acero inoxidable. 100 ud.

Technical specifications

Físico

Dimensiones físicas	20 x 50 mm (W x L)
Peso neto	1.05 kg
Material	Acero Inoxidable

Medioambiental

Entorno	Interior, Exterior
---------	--------------------

- ACA-BL05SS-100

Dimensions (l x w)	50 x 20mm
Weight	1.05kg
Material	Stainless Steel
Quantity	100



Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 24 August 2022 - 10:22