


EST-XCTRLN-4

4 loudspeaker line control card

Overview

EST-xCTRLN-4 provides 4 independent speaker line outputs (A, B, C, D). Card allows to switch between main and spare amplifiers. Line measurement methods can be made by: Impedance, Loop or End of Line Module (EOL). The measurement method is selected from the software configuration.

EST-xCTRLN-4 provides fault detection, opening , ground leakage and surveillance amplifiers on common 100 V buses.

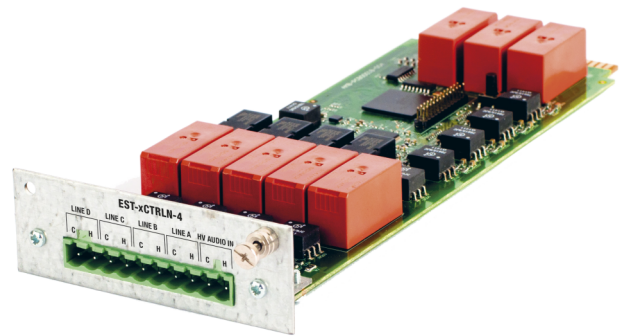

EST-XCTRLINE-4

4 loudspeaker line control card

Technical specifications

Eléctrico

Consumo de corriente	152 mA max. for 48 V
----------------------	----------------------

Físico

Dimensiones físicas	70 x 215 x 30 mm (W x H x D)
---------------------	------------------------------

Medioambiental

Temperatura de funcionamiento	0 to +60°C
-------------------------------	------------

Temperatura de almacenamiento	-20 to +70°C
-------------------------------	--------------

Humedad relativa	Operation: 15% to 80% noncondensing Storage: 5% to 95% noncondensing
------------------	---

Regulatory

Normativas	EN54-16
------------	---------

Electrical

Power supply	Internal from the Control Unit backplane
--------------	--

Type of connector	10 pin screw terminal type PHOENIX, 5.08 mm
-------------------	---

Impedance measurement frequency	1 kHz to 48 kHz
---------------------------------	-----------------

Frequency of the signal for EOL modules	18 kHz to 24 kHz
---	------------------

Maximum measured current	20 A
--------------------------	------

Maximum measured voltage	200 V
--------------------------	-------

Accuracy of measurement	up to 5%
-------------------------	----------

Physical

Accessories	Screw terminals 10 pins, the distance between the partitions 5.08 mm
-------------	--



Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 4 April 2023 - 9:42