


# EST-XLOGOUT-8F

## 8 logical outputs card (function slot)

### Overview

---

The logical output card has eight fully programmable relays which can be used for acknowledge the various states of the EST ENT VES outside to other systems. The channels from 1 to 4 are equipped with NC and channels from 5 to 8 with NO type of relays.

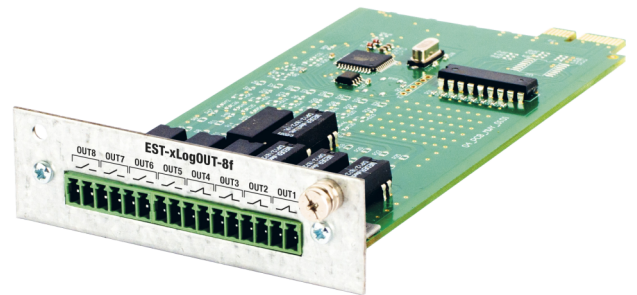

# EST-XLOGOUT-8F

## 8 logical outputs card (function slot)

### Technical specifications

---

#### Eléctrico

---

Consumo de corriente 10 mA at 48 V

---

#### Físico

---

Dimensiones físicas 70 x 160 x 25 mm (W x H x D)

---

#### Medioambiental

---

Temperatura de funcionamiento 0°C to +60°C

---

Temperatura de almacenamiento -20°C to +70°C

---

#### Regulatory

---

Normativas EN54-16

---

#### Electrical

---

Power supply Internal from the Control Unit

---

Switching current 0.5 A max.

---

Switching voltage 48 V max.

---

Switching power 20 W max.

---

#### Output

---

Number of logic outputs 8, each

---

Type of outputs 4x NC; 4x NO

---

Connector type 16 pin screw terminal type PHOENIX, 3.5 mm

---

#### Environmental

---

Operating humidity 15% to 80% non-condensing

---

Storage humidity 5% to 95% non-condensing

---

#### Physical

---

Accessories Connector with screw terminals 16 pins, the distance between the partitions of 3.5 mm

---



Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de [es.firesecurityproducts.com](http://es.firesecurityproducts.com) o póngase en contacto con su comercial.

Last updated on 5 April 2023 - 18:41